



NOTES

1. Messenger wire shall be attached using a double wrap around and 3 bolt clamp assembly on steel poles or a 1/2" (12.7 mm) thru-bolt (or thimble-eye bolt) with washers on wood poles.
2. The pole mounted type splice enclosure may be used as an alternative splice method unless otherwise specified in the plans. Pole attachment shall be by means of tapped screws on steel poles and lag screws on wood poles. The box shall be gasketed and weathertight, and not dipped galvanized if constructed of steel. Minimum box requirements shall be 3" x 3" x 4" (76.2 mm x 76.2 mm x 101.6 mm) with 12 terminal connections (20 amp).
3. The interconnect or loop detector lead-in cable shall have a sag between 3% and 5% or match existing utility lines.
4. The interconnect or loop detector lead-in messenger wire shall be grounded at the first and last poles in a cable run and at intervals not to exceed 1200 feet (366 m). When attached to wood poles, the messenger wire shall be grounded by bonding to an existing ground rod. The messenger wire shall be bonded to grounded steel poles by use of a 1/2" bolt, drilled and tapped into the pole.
5. The minimum 3-bolt size clamp shall be 6" (152 mm) long with 1/2" (12.7 mm) diameter bolts. Preformed guy grips shall not be used to attach the messenger wire to the signal poles. Their use is limited to bullring attachments.
6. The double wraparound wire attachment shall only be allowed on round, tapered steel strain poles. For other poles, refer to DOT standard drawings.

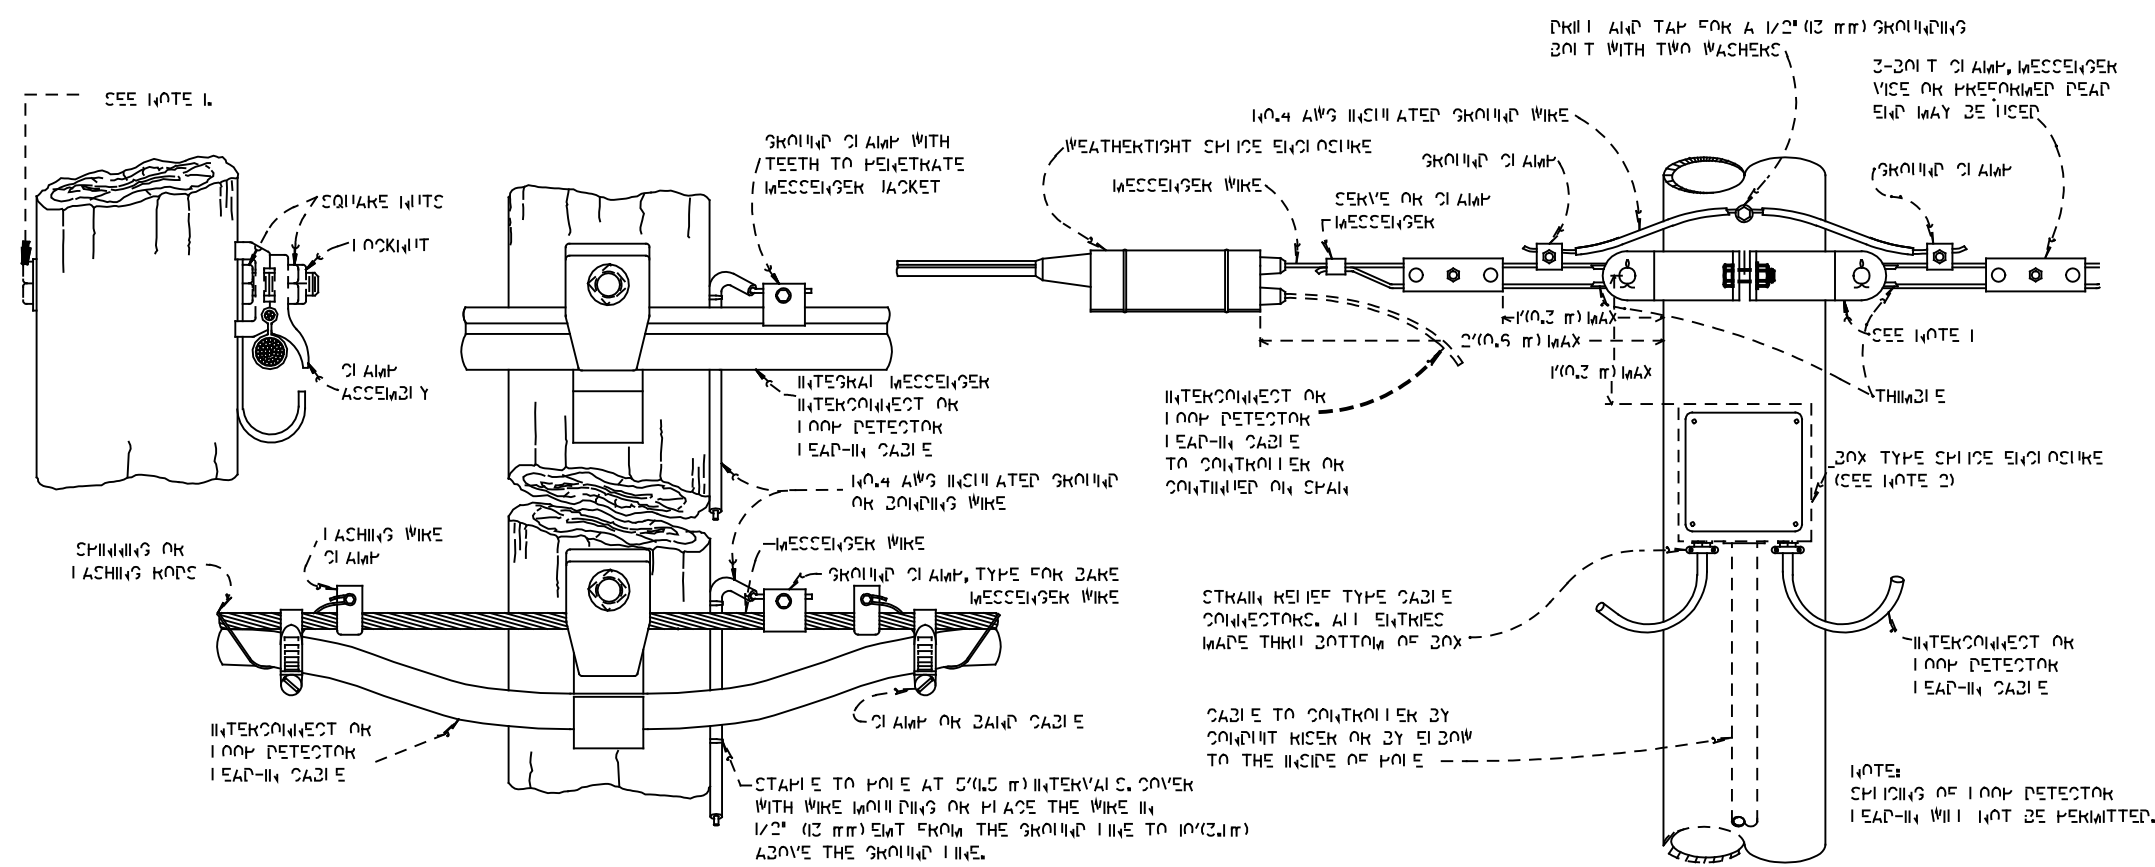


INTERCONNECT AND LOOP DETECTOR LEAD-IN ATTACHMENT DETAIL

DOWN GUY ASSEMBLY

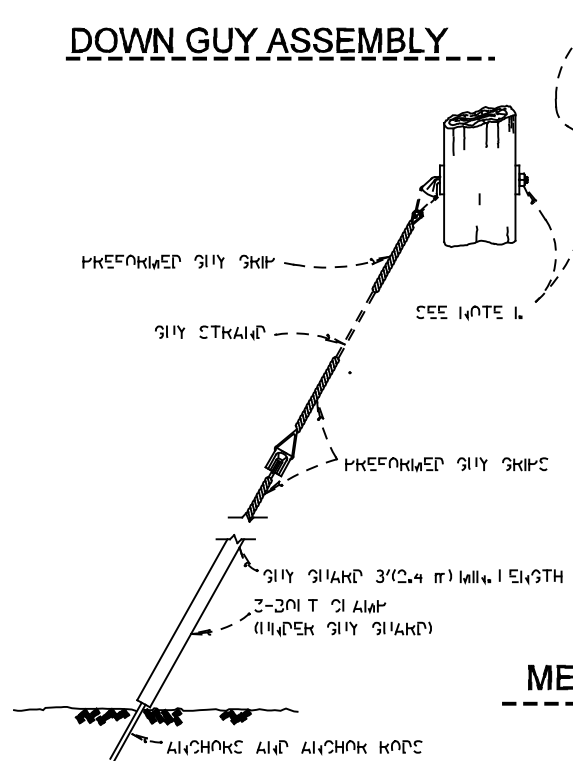

MESSENGER WIRE WITH ACCESSORIES

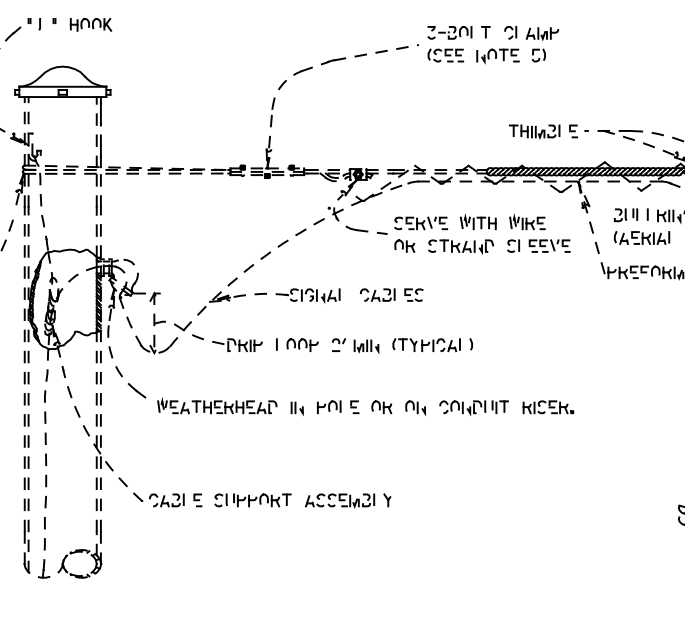

ALTERNATE MESSENGER WIRE ASSEMBLY

